# LEVEL

Note on the Energy Release Rate
For a Crack Starting from the Apex
of a Wedge

by

Chikayoshi Yatomi

Department of Mathematics
Carnegie-Mellon University
Pittsburgh, Pennsylvania 15213

June 1980

DTIC
ELECTE
SEP 4 1980

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|---|---|---|
| 1. REPORT NUMBER<br>AFOSR-TR- 80-0681 | 2. GOVT ACCESSION NO.<br>AD-A089116 | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle)<br>NOTE ON THE ENERGY RELEASE RATE FOR A CRACK STARTING FROM THE APEX OF A WEDGE | | 5. TYPE OF REPORT & PERIOD COVERED<br>INTERIM rept<br>6. PERFORMING ORG. REPORT NUMBER<br>16 |
| 7. AUTHOR(s)<br>CHIKAYOSHI YATOMI | | 8. CONTRACT OR GRANT NUMBER(s)<br>AFOSR-76-3013 |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS<br>CARNEGIE-MELLON UNIVERSITY<br>DEPARTMENT OF MATHEMATICS<br>PITTSBURGH, PA 15213 | | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS<br>2307B1<br>61102F |
| 11. CONTROLLING OFFICE NAME AND ADDRESS<br>AIR FORCE OFFICE OF SCIENTIFIC RESEARCH/NA<br>BLDG 410<br>BOLLING AIR FORCE BASE, DC 20332 | | 12. REPORT DATE<br>16 June 1980<br>13. NUMBER OF PAGES<br>4 |
| 14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office) | | 15. SECURITY CLASS. (of this report)<br>UNCLASSIFIED<br>15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

FRACTURE
ELASTICITY

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Griffith [1] was apparently the first to employ the energy release rate $G$ as a critical condition of crack extension. In this note we will show, however, that if a crack starts from the apex of a wedge (cf. Figure 1 with n ≠ 1), the initial value of $G$ is zero, although the stresses at the crack tip are unbounded. This example suggests that you cannot use the initial energy release rate as a critical condition of crack extension unless the opening-angle of the crack faces in the reference is precisely zero. Since the order of the

DD FORM 1473
1 JAN 73

singularity of the strain energy density is less than one, this result may be predicted mathematically but it is not trivial physically.

We confine our problem to a simple mode III crack; the given solutions are then simple and of closed-form, so that we can examine the precise dependence of $G$ on the crack length a. To the author's knowledge, no such closed-form solutions for an arbitrary crack length a have been presented (see, for example, Khrapkov [2] for Mode I and II).

$G$

Accession For

NTIS GRA&I
DDC TAB
Unannounced
Justification

By
Distribution/
Availability Codes
Avail and/or
special

Dist

## Abstract

We show that for a mode III crack starting from the apex of a wedge, the initial value of the energy release rate is zero, although the stresses at the crack tip are unbounded.

# Note on the Energy Release Rate for a Crack

## Starting from the Apex of a Wedge

C. Yatomi

Department of Mathematics
Carnegie-Mellon University
Pittsburgh, PA  15213, USA

## Introduction

Griffith [1] was apparently the first to employ the energy release rate $\mathcal{G}$ as a critical condition of crack extension.  In this note we will show, however, that if a crack starts from the apex of a wedge (cf. Figure 1 with $n \neq 1$), the initial value of $\mathcal{G}$ is zero, although the stresses at the crack tip are unbounded. This example suggests that you cannot use the initial energy release rate as a critical condition of crack extension unless the opening-angle of the crack faces in the reference is _precisely zero_.  Since the order of the singularity of the strain energy density is less than one, this result may be predicted mathematically but it is not trivial physically.

We confine our problem to a simple mode III crack; the given solutions are then simple and of closed-form, so that we can examine the precise dependence of $\mathcal{G}$ on the crack length  a.  To the author's knowledge, no such closed-form solutions for an arbitrary crack length  a  have been presented (see, for example, Khrapkov [2] for Mode I and II).
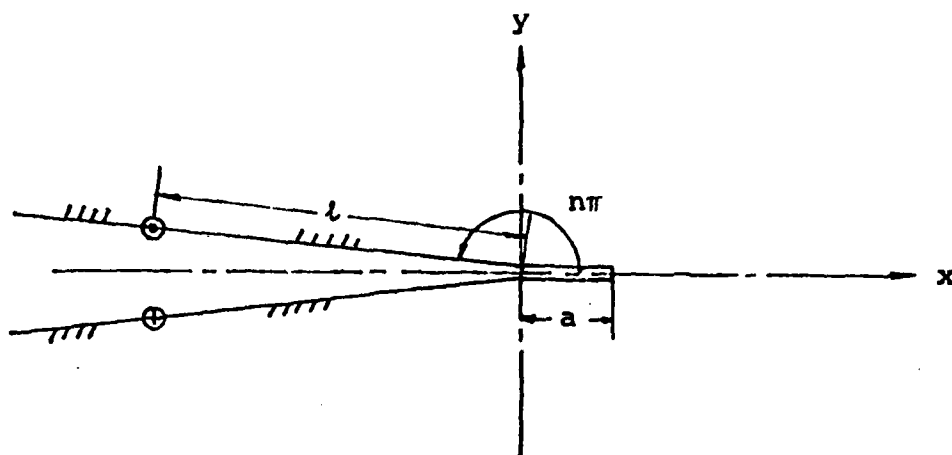
Fig. 1  A crack starting from the apex of a wedge

## Brief Methods of Solutions

Following the theory developed by Sih [3], we will analyse Mode III crack of length  a  which starts from the apex of an infinite wedge subjected to concentrated forces  P  acting in opposite directions at  $z = \ell e^{\pm in\pi}$  (Fig.1).

We employ a function

$$z = w(\zeta) = e^{-n\pi i}(\zeta^2 - a^{1/n})^n, \quad 0 < n \le 1, \qquad (1)$$

which maps the upper side of the crack to  $-a^{1/2n} \le \text{Real}(\zeta) \le 0$, the lower side to  $0 \le \text{Real}(\zeta) \le a^{1/2n}$, and the points at which the forces  P  are acting to  $\beta = \pm(\ell^{1/n} + a^{1/n})^{1/2}$, respectively.

With the aid of equation (16) of Sih [3], the relevant stress function is

$$F(\zeta) = \frac{P}{\pi G} \log \frac{\zeta + \beta}{\zeta - \beta}, \qquad (2)$$

where  G  is the shear modulus.  The stresses  are then given in the form

$$\sigma_{xz} - i\sigma_{yz} = G\ \frac{F'(\zeta)}{w'(\zeta)}$$

$$= \frac{P}{\pi}\ \frac{2\xi}{\hat{\beta}^2 - \zeta^2}\ \frac{1}{2ne^{-n\pi i}\zeta(\zeta^2 - a^{1/n})^{n-1}}$$

in the $\zeta$-plane, or

$$= \frac{P}{\pi}\ \frac{(\ell^{1/n} + a^{1/n})^{1/2}}{\ell^{1/n} + z^{1/n}}\ \frac{-1}{n(a^{1/n} - z^{1/n})^{1/2}z^{1-1/n}}\ , \qquad (3)$$

$$= \frac{P}{\pi}\ \frac{\ell^{1/2n}}{\ell^{1/n} + z^{1/n}}\ \frac{i}{nz^{1-1/2n}} \qquad \text{for}\quad a = 0 \qquad (4)$$

in the z-plane.

Equations (3) and (4) show, as is expected, that the stress singularity of order 1/2 has changed discontinuously order to $1 - 1/2n$ at $a = 0^+$. (This is another example of simple closed-form solution exhibiting the singularity transition phenomenon which was studied by Nuismer and Sendeckyj [4].)

Inserting equations (1) and (2) into equation (7) of [3] yields the solution for the stress-intensity factor:

$$K(a)\ =\ \frac{P}{\pi}\ \frac{\sqrt{2}}{(\ell^{1/n} + a^{1/n})^{1/2}}\ \frac{a^{1/2n-1/2}}{n^{1/2}}\ .$$

Since $Q = \pi K^2/2G$, the energy release rate is give by

$$\mathcal{G}(a)\ =\ \frac{P^2}{\pi G}\ \frac{a^{1/n-1}}{(\ell^{1/n} + a^{1/n})n}\ . \qquad (5)$$

Equation (5) shows that

$$\mathcal{G}(a)\ \sim a^{1/n-1} \qquad \text{as}\quad a \to 0\ ,$$

and the initial value of $G(a)$ at $a = 0^+$ is zero unless $n = 1$, as noted in the introduction.

References

1.  Griffith, A. A., "The Phenomena of Rupture and Flow in Solids," Philosophical Transactions of Royal Society of London, A221, 1921, pp. 163-198.

2.  Khrapkov, A. A., "The First Basic Problem for a Notch at the Apex of an Infinite Wedge," International Journal of Fracture Mechanics, Vol. 7, 1971, pp. 373-382.

3.  Sih, G. C., "Stress Distribution Near Internal Crack Tips for Longitudinal Shear Problems," JOURNAL OF APPLIED MECHANICS, Vol. 32, 1965, pp. 51-58.

4.  Nuismer, R. J. and Sendeckyj, G. P., "On the Changing Order of Singularity at a Crack Tip," JOURNAL OF APPLIED MECHANICS, Vol. 44, 1977, pp. 625-630.